

Review of Active Reactive Power Flow Control Using Static Synchronous Series Compensator (SSSC)

Prashant Dhoble¹, Arti Bhandakkar²

¹(M.Tech IV Sem Power System, Department of Electrical and Electronics Engineering, SRIT Jabalpur, RGPV University Bhopal, Madhya Pradesh, India, dhobleprashant123@gmail.com)

²(Associate Professor, Department of Electrical and Electronics Engineering, SRIT Jabalpur, RGPV University Bhopal, Madhya Pradesh, India, artibhaa@gmail.com)

ABSTRACT

The control of power and the usable capacity enhancement of present as well as new and upgraded line can be effectively done by FACTS technology. In this paper describe the active and reactive power flow into the line for the purposed of compensation as well as enhancement of power transmission capability of transmission line. The active and reactive power flow control through a transmission line by placing SSSC at the middle of power system. The SSSC or S³C or SSC is a voltage source convertor based series FACT device that's provide inductive, capacitive compensation independent of line current magnitudes. In this paper the series compensation for the management of power flow control used to improve the performance of the power system. This paper proposed the superior ability can only be achieved by appropriate control scheme and controller setting.

Keywords - Active and Reactive Power flow control, Control operation of SSSC, Flexible AC transmission system (FACTS), Modes of SSSC, Series Power line compensation.

1. INTRODUCTION

Now a day's power system are undergoing numerous changes and becoming more complex from operation, control and stability maintenance stand points when they meet ever increasing load demand [1]. The power flow in ac power system give the significant electrical storage, the electrical generation and load must balance at all times [2]. One of the most important problems in the control of energy transmission systems is the reactive power compensation. Reactive power causes the increase in the transmission systems losses, decrease in power capacity carried in the transmission lines and the changes in the voltage amplitude at the end of the lines. Hence it is necessary to provide reactive

power compensation in order to increase transmittable power, decrease losses and provide voltage amplitude stability [3].

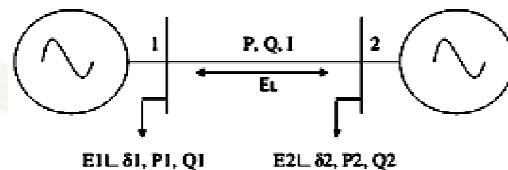


Fig. 1. AC power flow control of transmission line between two machine systems [2].

Figure 2 shows that current flow phasor is perpendicular driving voltage (90° phase lag). If the angle between the two bus voltages is small, the current flow largely represents the active power. Increase or decreasing the inductive impedance of a line will greatly affect the active power flow. Thus, impedance control which in reality provides current control, can be most cost effective means of controlling the power flow, it can be used for power flow control and or control for stability [2].

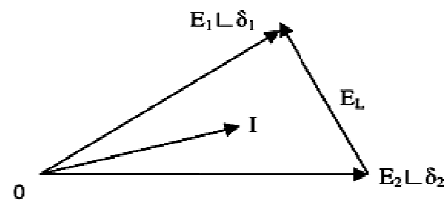


Fig. 2. Current flow perpendicular to the driving voltage phasor diagram [2].

Figure 3 corresponding to Figure 2 shows a phasor diagram of the relation between active and reactive current with reference to the voltages at the two ends [2]. Power flow calculations are performed in power systems for operational planning and operation control [4].

Active component of the current at the two end of the transmission line at E1 and E2 is:

$$I_{p1} = E_2 \sin \delta / x \quad (1)$$

$$I_{p2} = E_1 \sin \delta / x \quad (2)$$

Active power at the two ends at E1 and E2 is:

$$P_1 = E_1 (E_2 \sin \delta) / x \quad (3)$$

$$P_2 = E_2 (E_1 \sin \delta) / x \quad (4)$$

Reactive component of the current at the two end of the transmission line at E1 and E2 is:

$$I_{q1} = (E_1 - E_2 \cos \delta) / x \quad (5)$$

$$I_{q2} = (E_2 - E_1 \cos \delta) / x \quad (6)$$

Reactive power at the two end at E1 and E2 is:

$$Q_1 = E_1 (E_1 - E_2 \cos \delta) / x \quad (7)$$

$$Q_2 = E_2 (E_2 - E_1 \cos \delta) / x \quad (8)$$

Naturally P_1 and P_2 are the same:

$$P_1 = E_1 E_2 \sin \delta / x \quad (9)$$

Where,

X = is the impedance of the line,

E_1, E_2 = bus end voltage,

δ = angular difference of the end bus voltages.

Thus, varying the value of X will vary P , Q_1 , and Q_2 in according with above equation [2],[5].

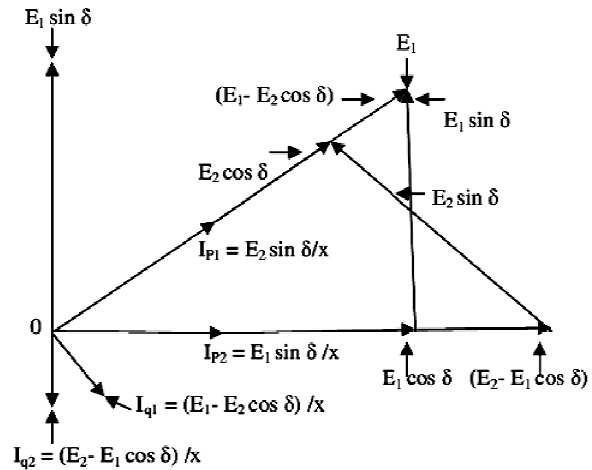


Fig.3. Active and reactive power flow phasor diagram [2].

This makes series compensation a highly effective means for up keeping or even increasing voltage stability in a heavily loaded transmission circuit and likewise, it allows additional power transmission over the circuit without upsetting voltage stability [5]. With the reactance of the capacitive element, i.e. the series capacitor equal to X_C and the inductive reactance of the line equal to X_L , we can define the degree of series compensation [6].

$$k = X_C / X_L \quad (10)$$

II. SERIES COMPENSATION

The series compensation is an economic method of improving power transmission capability of the lines [7], [8], [9] VAR compensation can also be of the series type. Typical series compensation systems use capacitors to decrease the equivalent reactance of a power line at rated frequency. The connection of a series capacitor generates reactive power that, in a self regulated manner, balances a fraction of the line's transfer reactance. The result is improved functionality of the power transmission system through:

- Increased angular stability of the power corridor.
- Improved voltage stability of the corridor.
- Optimized power sharing between parallel circuits.

Like shunt compensation, series compensation may also be implemented with current or voltage source devices as shown in Figure 4 and Figure 5. The results obtained with the series compensation through a voltage source which has been adjusted again to have unity power factor operation at V_2 [9]. However the compensation strategy is different when

compared with shunt compensation. In this case voltage V_{COMP} has been added between the line and the load to change the angle of V_2 which is now the voltage at the load side. With the appropriate magnitude adjustment of V_{COMP} , unity power factor can again be reached at V_2 . As can be seen from the phasor diagram of Figure 5, V_{COMP} generates a voltage with opposite direction to the voltage drop in the line inductance because it lags the current I_P [9].

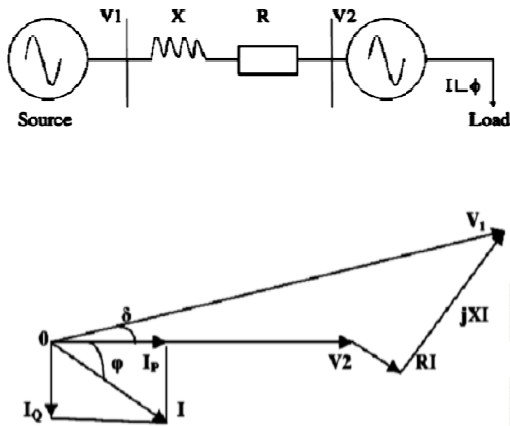


Fig. 4. Power system without compensation [9].

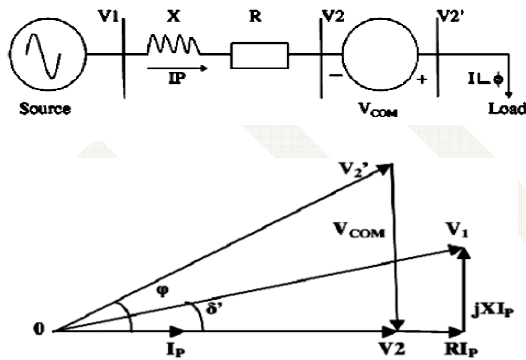


Fig. 5. Principles of Series compensation with a voltage source [9].

III. FLEXIBLE AC TRANSMISSION SYSTEM (FACTS)

Now a day's electrical power systems are more complex and it's require careful design of new devices are needed to improve electric power utilization while still maintaining reliability, stability, minimizing power loss and security. Thus, this needs a review of traditional methods and the creation of new concepts that emphasize a more efficient use

of already existing power system resources without reduction in system stability and security. The proposed concept is known as Flexible AC Transmission Systems (FACTS) [2], [10]-[12]. The main objectives of FACTS devices are to increase the transmission capacity, minimize the power loss, maintaining stability, reduce the power system cost and control power flow over designated transmission routes [13]. The following are the benefits applications and advantages of FACTS devices are [14]. That is principally derived by using the FACTS controllers:

- Power flow control.
- Increase of transmission capability.
- Voltage control.
- Reactive power compensation.
- Stability improvement.
- Power quality improvement.
- Flicker mitigation.
- Interconnection of renewable and distributed generation and storages [14].
- Rapid, continuous control of the transmission line reactance [15].

IV. BASIC FACTS CONTROLLER SSSC

Now for maximum utilization of any FACTS device in power system planning, operation and control power flow solution of the network that contains any of these devices is a fundamental requirement, As a result many excellent research works have been carried out in the literature for developing efficient load flow algorithm for FACTS devices [14], [16]-[19]. In general FACTS controller can be dividing into main four categories [2]:

- Series controller: TCSC, SSSC, TSSC, TCSR, TSSR, IPFC.
- Shunt controller: STATCOM, STATCOM-BESS, SVC, SVG or SVA, SVS, TCR, TSC, TSR, TCBR, SMES, BESS, SSG.
- Series-Series controller.
- Series-Shunt controller: UPFC, TCPST, IPC.
- Other controller: TCVL, TCVR.

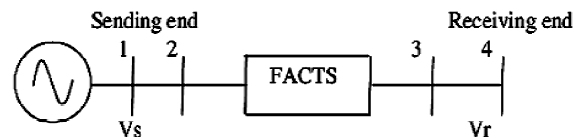


Fig. 6. SMIB with FACTS device [20].

The static synchronous series compensator (SSSC) can be operated without an external energy source as reactive power source with and fully controllable independent of transmission line current for the purpose of increasing or decreasing the overall reactive voltage drop across the transmission line and there by controlling the electric power flow shown in figure 7 [21].

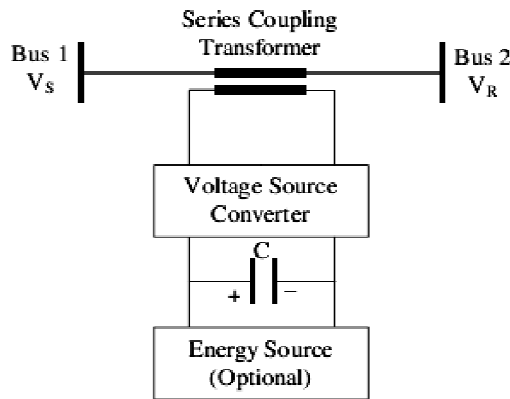


Fig. 7. SSSC Configuration [21].

The static synchronous series compensation (SSSC) is a series connected FACTS controller based on VSC [22]. The equivalent circuit diagram of SSSC is shown in figure 8 [22].

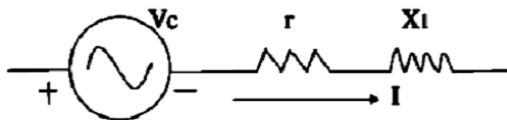


Fig. 8. An Equivalent circuit of SSSC [20].

The magnitude of V_c can be controller to regulate power. The winding resistance and leakages reactance of the connecting transformer appears is series with the voltage source V_c . If there is no energy source on the DC side, neglecting losses in the converter and DC capacitor, the power balance in steady state condition [22].

$$\text{Re}[V_c I^*] = 0 \quad (11)$$

The most critical disturbances for the SSSC are faults on the load side that cause high current flows through the series transformer and the conducting VSC valves. Even if the turn off devices is blocked, the fault current may circulate through the anti parallel diodes. In order to prevent these devices from being thermally destroyed a bypass equipment is used. This

equipment consists of a bypass electronic switch, made up of two anti parallel thyristor and a mechanical bypass switch that allows the entire SSSC to be bypassed. When the feeder current becomes greater than a threshold level, the thyristor are triggered and start to conduct [23].

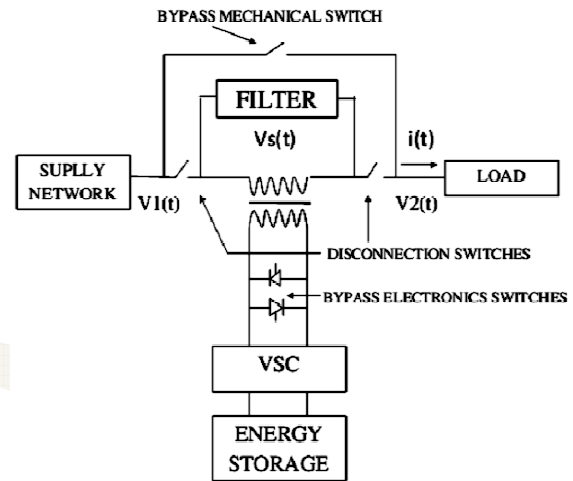


Fig. 9. SSSC or SSC general structure [23].

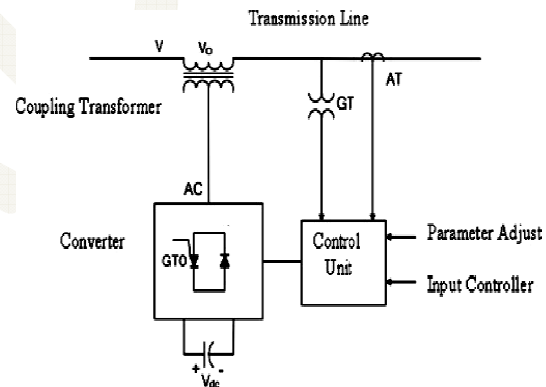


Fig. 10. SSSC simplified diagram [24].

Synchronous Series Compensator (SSSC) is a modern power quality FACTS device that employs a voltage source converter connected in series to a transmission line through a transformer. The SSSC operates like a controllable series capacitor and series inductor. The primary difference is that its injected voltage is not related to the line intensity and can be managed independently. This feature allows the SSSC to work satisfactorily with high loads as well as with lower loads [25]. The Static Synchronous Series Compensator has three basic component is shown in figure 11 [25].

- Voltage Source Converter (VSC) – main component.
- Transformer – coupled the SSSC to the transmission line.
- The flow Energy Source – provides voltage across the DC.
- The flow capacitor and compensate for device losses.

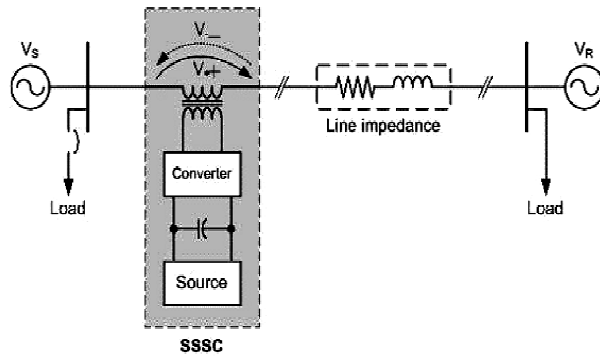


Fig. 11. SSSC connected to two machine power system [25].

The SSSC is typically applied to correct the voltage during a fault in the power system. However it also has several advantages during normal conditions [25]:

- Load balancing in interconnected distribution networks.
- It can also help to cover the capacitive and reactive power demand.
- Power flow control.
- Reduces harmonic distortion by active filtering [25].

Table 1 Constraint equation and control variables for FACTS controllers [26].

| Controller | Constraint Equation | Control Variable |
|-------------------------------|--------------------------------------------------------------------------|------------------|
| SVC | $V_p = 0, V_r = 0, I_p = 0, I_r = -B_{SVC} V_1$ | B_{SVC} |
| TCSC | $V_p = 0, I_p = 0, I_r = 0, V_r = X_{TCSC} I_2$ | X_{TCSC} |
| STATCOM | $V_p = 0, V_r = 0, I_p = 0,$ | I_r |
| STATCOM (With Energy Source) | $V_p = 0, V_r = 0$ | I_p, I_r |
| TCPAR (SPAT) | $E = V_1(e^{j\Phi} - 1) \sim jV_1\Phi, V_1I_p = V_pI_2, V_1I_r = I_2V_r$ | Φ |
| SSSC (S ³ C) (SSC) | $V_p = 0, I_p = 0, I_r = 0,$ | V_r |
| SSSC (With Energy Source) | $I_p = 0, I_r = 0,$ | V_p, V_r |

V. OPERATING PRINCIPLE OF SSSC

The SSSC sometimes called the S³C is a series connected synchronous voltage source that can vary the effective impedance of a transmission line by injecting a voltage containing an appropriate phase angle in relation to the line current. It has the capability of exchanging both active and reactive power with the transmission system [27]-[41]. The SSSC comprises a multi phase VSC with a dc energy storage controller and functional representation of active reactive power flow as shown in Figure 12 [7], [26]. Here the controller is connected in series with the transmission line. The operating modes of the SSSC are illustrated in Figure 12.

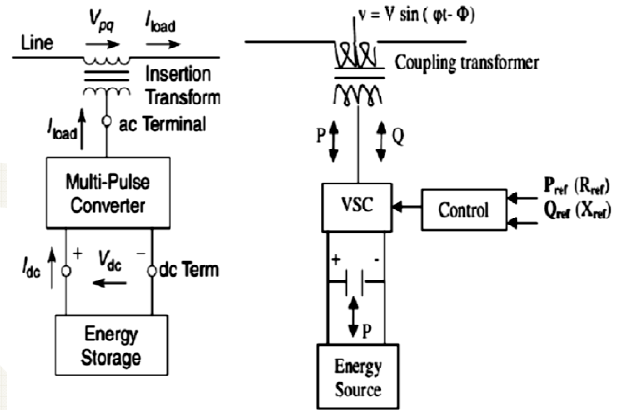


Fig. 12. Generalized series connected synchronous voltage source employing multi pulse converter with an energy storage device [26] and Functional representation of active reactive power flow [7].

The sinusoidal voltage at the desired fundamental frequency which controllable amplitude and phase angle generate and absorb reactive power and exchange real power with the ac system and its dc terminal is connected to a suitable dc energy source for storage. To exchange reactive power with the ac system or with an external dc power supply like energy storage device to also exchange independently controllable real power. The references P_{ref} , Q_{ref} or other related parameters such as desired compensating reactive impedances X_{ref} and R_{ref} define the amplitude V and phase angle ϕ of the generated output voltage necessary to exchange desired active and reactive power at the ac output. If the VSC is operated strictly for reactive power exchange P_{ref} or R_{ref} is set to zero [7]. The basic dc voltage for conversion to ac is provided by the capacitor and the dc/ac conversion is achieved by pulse width modulation (PWM) techniques [42], [43].

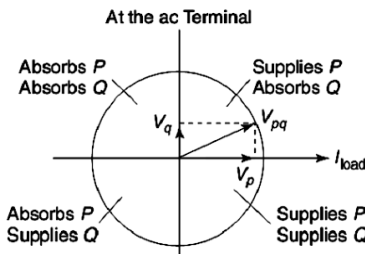


Fig. 13. The different operating modes of SSSC for real and reactive power exchange [26].

Table 2. SSSC Phasor diagram description [44]

| Quadrant | P and Q |
|----------|----------------------------------------------------------------------------|
| I | $P = V_{pq} I_{Line} \cos \phi > 0$ $Q = V_{pq} I_{Line} \sin \phi > 0$ |
| II | $P = V_{pq} I_{Line} \cos \phi < 0$ $Q = V_{pq} I_{Line} \sin \phi < 0$ |
| III | $P = V_{pq} I_{Line} \cos \phi < 0$ $Q = V_{pq} I_{Line} \sin \phi > 0$ |
| IV | $P = V_{pq} I_{Line} \cos \phi > 0$ $Q = V_{pq} I_{Line} \sin \phi < 0$ |

Theoretically, SSSC operation in each of the four quadrants is possible but there are some limitations to the injected SSSC voltage due to operating constraints of practical power system. In capacitive mode, the injected SSSC voltage is made to lag the transmission line current by 90° [45]-[47].

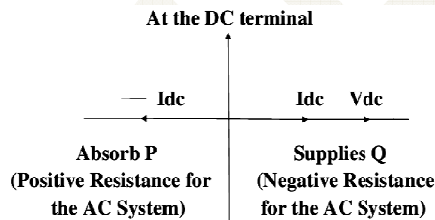


Fig.14. The different operating modes for real and reactive power exchange [26].

A series capacitor compensates the transmission line inductance by presenting a lagging quadrature voltage with respect to the transmission line current. This voltage acts in opposition to the leading quadrature voltage appearing across the transmission line inductance, which has a net effect of reducing the line inductance. Similar is the operation of an SSSC that also injects a quadrature voltage V_c in proportional to the line current but is lagging in phase:

$$V_c = jkX_L I_L \quad (12)$$

Where, V_c = the injected compensating voltage, I_L = the line current, X = the series reactance of the transmission line, k = the degree of series compensation. The current in a line compensated at its midpoint by the SSSC is expressed as [48], [49]:

$$I_L = 2V \sin \delta / X + V_c / X \quad (13)$$

The corresponding line-power flow is then expressed as

$$P = V I_L \cos(\delta/2) \quad (14)$$

$$P = V^2 \sin \delta / X + V V_c \cos(\delta/2) / X \quad (15)$$

Where, V = the magnitude of voltage (assumed to be the same) at the two ends of the transmission line, δ = angular difference across the line.

VI. POWER FLOW CONTROL AND SERIES REACTIVE COMPENSATION USING SSSC

The exchange of reactive power between the converter and the ac system can be controlled by varying the amplitude of the 3-phase output voltage E_s of the converter. That is, if the amplitude of the output voltage is increased above that of the utility bus voltage, then a current flow through the reactance from the converter to the ac system and the converter generates capacitive reactive power for the ac system. If the amplitude of the output voltage is decreased below the utility bus voltage, then the current flows from the ac system to the converter and the converter absorbs inductive reactive power from the ac system. In other words, the converter can supply real power to the ac system from its dc energy storage if the converter output voltage is made to lead the ac system voltage [13].

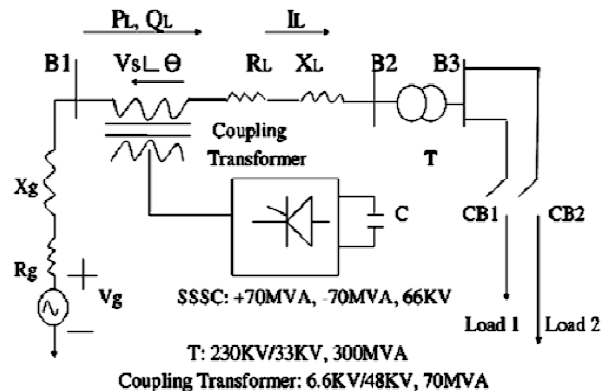


Fig.15. Schematic diagram of SSSC [50].

The system shown in Figure 15 describes the basic configuration of static synchronous series compensator using 48 pulse static synchronous series compensator. The capacity of SSSC is ± 70 MVAR whereas the main transformer has the capacity of 300 MVA (approximately 4 to 5 times). They have represented the model of SSSC by an equivalent Thevenin circuit at bus B1. The other major challenge in the implementation of VSC based SSSC is sufficiently high value of storage capacitor and therefore not cost effective [50].

$$P = V_s V_r \sin(\delta_s - \delta_r) / X_L = V^2 \sin \delta / X_L \quad (16)$$

$$Q = V_s V_r [1 - \cos(\delta_s - \delta_r)] / X_L = V^2 (1 - \cos \delta) / X_L \quad (17)$$

VII. THE CONTROL SYSTEM OF SSSC AND SWING CURVE

A typical SSSC control system is shown in Figure 16 [48]. It accomplishes the following functions:

- The introduction of desired series reactive compensation (Capacitive or Inductive).
- The damping of power swing oscillations and enhancement of transient stability.
- The control of current in the SSSC compensated line.

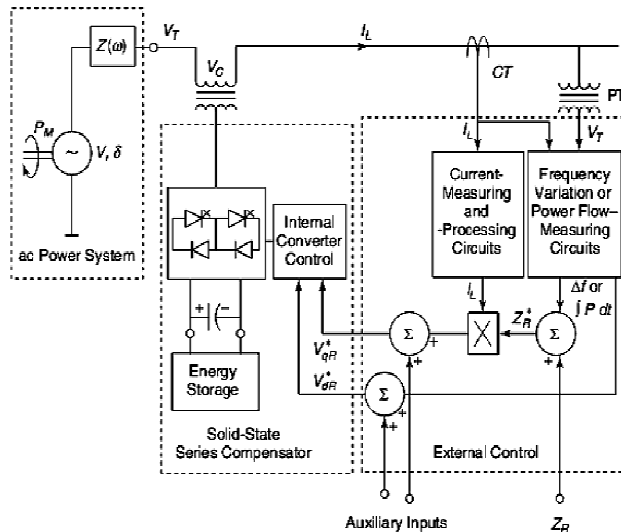


Fig.16. A basic control scheme for the solid state series compensator to control (P and Q), line impedance and improve system stability [48].

The line current I_L and the SSSC terminal voltage V_T are measured together with the bus frequency or the line power flow, which can either be measured directly or calculated from I_L and V_T measurements. The desired SSSC reactance is set by a reactance reference, Z_R . The SSSC acts as a voltage

source in synchronism with the ac system voltage, the magnitude and phase of which can be controlled by voltage reference inputs of V^*_{dr} and V^*_{qr} [48]. The signal V^*_{qr} regulates the SSSC output voltage component in quadrature with the line current. It thus determines the amount of reactive compensation (capacitive or inductive) introduced in the transmission line. The reactance reference Z_R is modulated with bus frequency or line power signals to generate Z^*R , which when multiplied with the rms line current I_L results in the signal V^*_{qr} . The signal V^*_{dr} determines the magnitude of the SSSC output voltage component that is in phase (or out of phase) with the line current [48]. The variation of SSSC injected voltage and STATCOM injected current shown in figure 17 [32].

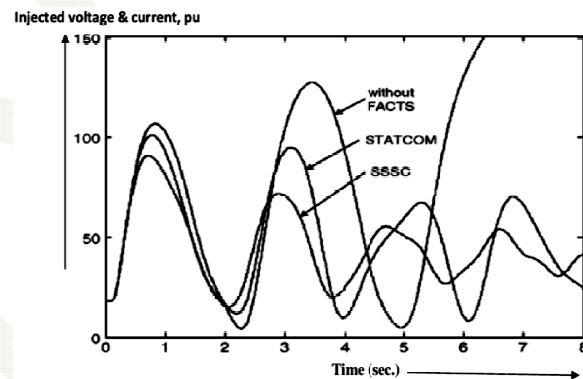


Fig.17. Swing curve of machine with and without a FACTS devices [32].

VIII. ONCLUSION

In this paper, the study of power transmission system it is desirable to maintain the voltage magnitude, phase angle and line impedance. Therefore, to control the power flow from one end to another end these concepts of power flow control and voltage injection is applied by Series compensation. The possible control scheme of SSSC and operating modes is described. This paper can be extended in future work for SSSC modeling with number of bus system and determine the method for controlling the active and reactive power flow in power system network.

ACKNOWLEDGEMENTS

I take this opportunity to express my profound gratitude and deep regards to my guide Mrs. Arti Bhandkar Associate Professor S.R.I.T Jabalpur, for his guidance, monitoring and constant encouragement throughout the course of this thesis. She inspired us greatly to work in this thesis. The blessing, help and guidance given by him time to time. We also would

like to thank her for showing us some example that related to the topic of our.

REFERENCES

- [1] Voltage stability of power systems: concepts, Analytical tools, and industry experience, IEEE Special Publication 90th 0358-2 PWR 1990.
- [2] N.G Hingorani, 2011, "Understanding facts: concepts Technology of flexible AC transmission system", IEEE Power Engg. IEEE press, Wiley India
- [3] L. Gyugyi, "Power Electronics in Electric Utilities: Static Var Compensators", Proceedings of the IEEE, Vol. 7 No.4, pp. 483-494, 1988.
- [4] B. Scott, "Review of load flow calculation methods", Pro IEEE 62 (7) (1974) 916-929.
- [5] A. J. Wood and B. F Wollen berg, "Power Generation Operation and Control", John Wiley and Sons, New York, USA 1984.
- [6] Bouktir T., Belkacemi M., Zehar K "Optimal power flow using modified gradient method", Proceedings ICEL 2000, U.S.T Oran, Algeria. pp. 436-442,2000.
- [7] N. Hingorani, L. Gyugyi, "Understanding FACTS, Concepts and Technology of Flexible AC Transmission Systems", IEEE Press, New York, 2000.
- [8] Lennart Angquist, Gunnar Ingestrom, Hans Ake onsson, "Dynamical performance of TCS schemes", CIGRE 2006 14:302, ABB power system.
- [9] Juan Dixon (SM), Luis Morán (F), Jose Rodriguez (SM), Ricardo Domke, "Reactive Power Compensation Technologies State of the Art Review", IEEE
- [10] T.V Cutsem, "Voltage instability: Phenomena, Counter measures and analysis methods", IEEE Vol 88, pp. 208,227, February 2000.
- [11] C.W. Taylor, "Power System Voltage Stability", New York, Mc Graw Hill 1994P.
- [12] P.Kundur, "Power System stability and control", Mc Graw Hill,1994.
- [13] G. Madhusudhana Rao, Dr. B.V Sanker Ram, B. Sampath Kumar, "TCSC designed optimal power Flow Using genetic algorithm", International Journal of Engineering Science and Technology Vol. 2(9), 2010, 4342-4349.
- [14] Xiao Ping Zhang, Christian Rehtanz, Bikash Pal, "Flexible AC transmission Systems: Modelling and Control" Springer Verlag Berlin Heidel berg 2006.
- [15] Venu Yarlagadda, Dr. B.V.Sankar Ram and Dr. K. R. M. Rao, "Automatic Control of Thyristor Controlled Series Capacitor (TCSC)", Vol. 2, Issue 3, May-Jun 2012, pp.444-449.
- [16] H. Fujita, Y. Watanabe and H. Akagi, "Dynamic Control and Performance of a Unified Power Flow Controller for Stabilizing an AC Transmission System", IEEE Trans. Power Elect. vol. 21, no. 4, pp.1013- 1020, July 2006.
- [17] N.P.Pathy, M.A. Abdel Moamen, "Power flow control and solutions with multiple and multi type FACTS devices", Electric power system research (October) (2004).
- [18] A .A. Edris, R. Aapa, M.H. Baker, L. Bohman, K. Clark, "Proposed terms and definitions for flexible ac transmission system (FACTS)", IEEE Tran. On power delivery Vol.12,No.4, Oct.1997.
- [19] A. Kumaran, A. Allirani "Location of FACTS devices for Real and Reactive Power Flow Control" IPCSIT vol.21, (2011) IACSIT Press, Singapore
- [20] Zonkoly A "Optimal Sizing of SSSC Controllers to Minimize Transmission Loss and a Novel Model of SSSC to Study Transient Response". (2006)
- [21] Taha S, Saad M, "Power Line Compensation Study of a Static Synchronous Series Compensator (SSSC) Based on Soft Switching 48 Pulse PWM Inverter", Austr.J. Basic Appl. Sci.,3(2): 1301-131(2009).
- [22] Akhilesh A. Nimje, Chinmoy Kumar Panigrahi and Ajay Kumar Mohanty "Enhanced power transfer Capability using SSSC", Journal of Mechanical Engineering Research Vol. 3 (2), pp. 48-56, February 2011.
- [23] K.K. Sen, "SSSC static synchronous series Compensator theory,modeling, and application", IEEE Trans. On Power Delivery vol. 13, No. 1, 1998.
- [24] L. Jebaraj, C. Christofer Asir Rajan, S. Sakthivel, "Incorporation of SSSC and SVC Devices for Real Power and Voltage stability Limit Enhancement through Shuffled Frog Leaping Algorithm under Stressed Conditions", European Journal of Scientific Research ISSN 1450-216X Vol.79 No.1 (2012), pp.119-132.
- [25] Choi S.S., Li B.H., Vilathgamuwa D.M., "Design and Analysis of the Inverter Side Filter Used in the Dynamic Voltage Restorer", IEEE Trans. on Power Delivery, vol. 17, No. 3, July 2002, pp. 857-864.
- [26] K.R Padiyar, "FACTS Controllers in power transmission and distribution", copywrite 2007, New Age Internationl, ISBN: 978-81-224-2142-2.
- [27] L. Gyugyi, C. D. Schauder, and K. K. Sen, "Static Synchronous Series Compensator: A Solid State Approach to the Series Compensation of Transmission Lines", IEEE Trans. on PWRD, 12,

- (1), (1997), pp. 406–417.
- [28] H. F. Wang, “Static Synchronous Series Compensation to damp power system oscillations”, *Electric Power Systems Research*, 54 (2), (2000), pp. 113–119.
- [29] P. Kumkratug and M. H. Haque, “Improvement of Stability Region and damping of a Power System by Using SSSC”, *Proceedings of IEEE Power Engineering Society General Meeting*, 13–17 July 2003, vol. 3, pp. 1417–1421.
- [30] R. Grunbaum, M. Noroozian and B. Thorvaldsen, “FACTS Powerful Systems for Flexible Power Transmission”, *ABB Review*, May 1999, pp. 4-17.
- [31] M.H. Haque, “Damping improvement by FACTS devices: A comparison between STATCOM and SSSC”, *Electric Power Systems Research* 76 (2006) 865–872.
- [32] IEEE Power Engineering Society/CIGRE, *FACTS Overview*, Publication 95 TP 10, IEEE Press, New York, 1995.
- [33] N. G. Hingorani and L. Gyugyi, “Understanding FACTS”, IEEE Press, New York 1999.
- [34] Y. H. Song and A. T. Johns, Eds., “Flexible AC Transmission Systems (FACTS)”, IEE Press, London 1999.
- [35] IEEE Power Engineering Society, “FACTS Applications”, Publication 96TP116 -0, IEEE Press, New York, 1996.
- [36] W. H. Litzenger, Ed., “An Annotated Bibliography of High Voltage Direct Current Transmission”, 1989– 1991, Published by the Bonneville Power Administration (BPA) and the Western Area Power Administration, Portland OR 1992.
- [37] W. H. Litzenger, Ed., “An Annotated Bibliography Of High Voltage Direct Current Transmission and Flexible AC Transmission (FACTS) Devices”, 1991– 1993, Published by the Bonneville Power Administration (BPA) and the Western Area Power Administration, Portland, OR, 1994.
- [38] W. H. Litzenger and R. K. Varma, Eds., “An Annotated Bibliography of High Voltage Direct Current Transmission and FACTS Devices”, 1994– 1995, Published by the Bonneville Power Administration (BPA) and the U.S. Department of Energy, Portland, OR, 1996.
- [39] W. H. Litzenger, R. K. Varma, and J. D. Flanagan, Eds., “An Annotated Bibliography of High Voltage Direct Current Transmission and FACTS Devices”, 1996–1997, Published by the Electric Power Research Institute (EPRI) and the Bonneville Power Administration (BPA), Portland, OR, 1998
- [40] C. J. Hatziadoniu and A. T. Funk, “Development of a Synchronous Voltage Source”, *IEEE Transactions on Power Delivery*, Vol. 11, No. 2, April 1996, pp. 1138 –1144.
- [41] K. K. Sen, “SSSC Static Synchronous Series Compensator: Theory, Modeling and Applications”, *IEEE Transactions on Power Delivery*, Vol. 13, No. 1, January 1998, pp. 241 –246.
- [42] B. T. Ooi, S. Z. Dai, and F. D. Galiana, “A Solid State PWM Phase Shifter”, *IEEE Transactions on Power Delivery*, Vol. 8, April 1993, pp. 573 –579.
- [43] Z. Zhang, J. Kuang, X. Wang, and B. Ooi, “Force Commutated HVDC and SVC Based on Phase Shifted Multi Converter Modules”, *IEEE Transactions on Power Delivery*, Vol. 8, No. 2, April 1993, pp. 712 – 718.
- [44] C. Udhayashankar, Princy Zachariah, Rani Thottungal, N. Nithyadevi, “SSSC Based Voltage Control and Power Oscillation Damping of Multi Area Power System”, *ISSN 1450-216X Vol. 87 No 4 October*, 2012, pp.479-490
- [45] A. H. Norouzi and A. M. Sharaf, “An auxiliary regulator for the SSSC transient enhancement”, in *Proc. IEEE 35th North Amer. Power System.*, Rolla, MO, Oct. 2003.
- [46] K.R. Padiyar, S. Krishna and Nagesh Prabhu, “On line detection of loss of synchronism in large power systems”, *International Conf. on Power Systems*, Katmandu, Nepal, November 2004.
- [47] A. H. Norouzi and A. M. Sharaf, “Two control Schemes to enhance the dynamic performance of the STATCOM and SSSC”, *IEEE Trans. Power Del.*, vol. 20, no. 1, pp.435– 442, Jan. 2005.
- [48] L. Gyugyi, “Dynamic Compensation of AC Transmission Lines by Solid State Synchronous Voltage Sources”, *IEEE Transactions on Power Delivery*, Vol. 9, No.2, April 1994, pp. 904 –911.
- [49] J. B. Ekanayake and N. Jenkins, “A Three Level Advanced Static Var Compensator”, *IEEE Transactions on Power Delivery*, Vol. 11 , No. 1 , January 1996, pp. 540 –545.
- [50] Toufan M, Annakkage UD, “Simulation of the unified power flow controller performance using PSCAD/EMTDC Electrical Power System”, *Res* 1998; 46:67-75.